


# Kiosk

**K27 II**

**Self-service / Self-order Kiosk**

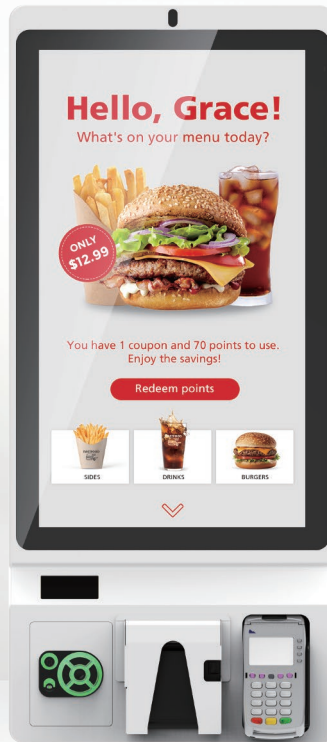


## FEATURES


- Bright 27" (1920 x 1080) touch display
- Wall mount or floor stand
- Single or doublesided operation
- Support for Windows 10/11, Linux Ubuntu and Android 11
- Multiple payments options (MSR, EMV and contactless)
- Customizable and modular design
- ANKER ADA-Pad (option) for accessibility

# Kiosk


## For an optimized workflow

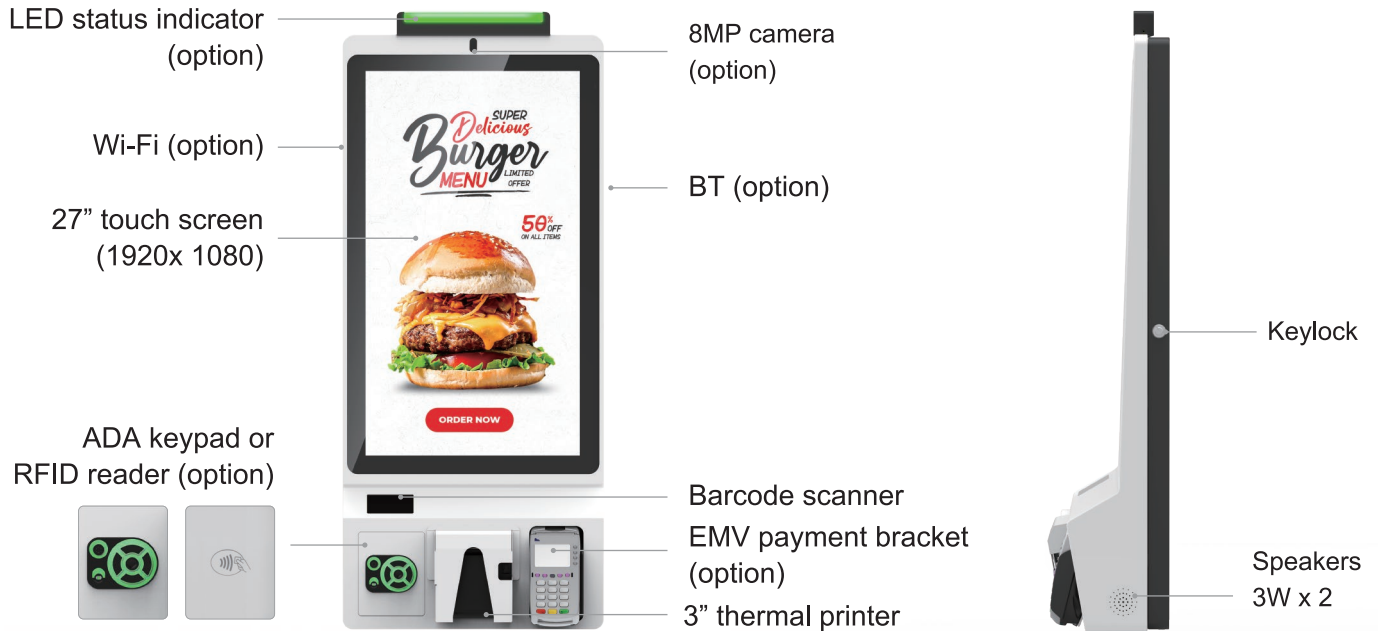

## Base Options

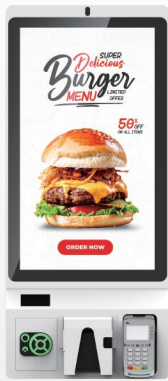


Wall Mounted

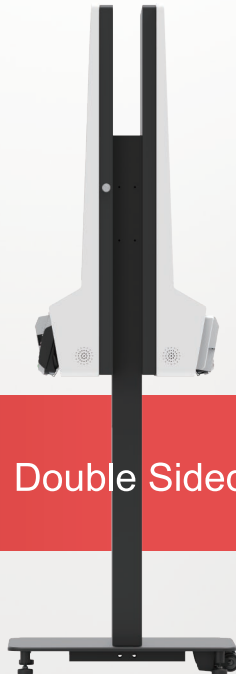

Double Sided



Floor Standing

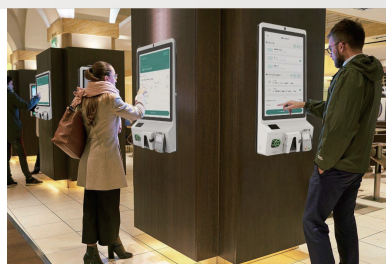

# Kiosk



## Specifications



Item	K27 II		
Display	27", 16:9, 1920 x 1080 (300 nits) 27", 16:9, 1920 x 1080 (650 nits)(option)		
Touch	PCAP touch		
CPU	<b>Alder Lake-P</b> Intel® Core™ i3-1215U Intel® Core™ i5-1245U, vPro Intel® Core™ i7-1265U, vPro	<b>Elkhart Lake</b> Intel® Celeron® J6412	<b>Rockchip RK3399</b>
Memory	DDR4 4GB / 8GB / 16GB / 32GB		DDR4 4GB
Storage	M.2 PCIe SSD: 128GB / 256GB / 512GB / 1TB		eMMC 32GB + 1x Micro SD card slot (up to 128GB)
I/O Ports	1 x Intel Gigabit Ethernet (Host) 1 x RJ45 Ethernet (EMV Payment) 1 x AC male power socket 1 x power switch button	1 x Gigabit Ethernet (Host) 1 x RJ45 Ethernet (EMV Payment)	
Speakers	2 x speaker (3W )		
Printer	3" thermal printer		
Peripheral Options	2D barcode scanner EMV terminal bracket 8MP camera RFID / NFC reader ADA keypad LED status indicator (multi-color light bar)		
Mounting Options	Floor stand (including wheels & handle) VESA wallmount bracket		
Wi-Fi / BT (option)	Wi-Fi 6E Intel AX210, IEEE 802.11 a/b/g/n/acR2/axR2 BT 5.3		Wi-Fi 5, IEEE 802.11a/b/g/n/ac, dual band (2.4 GHz / 5 GHz), BT 4.2
Operating System	1. Windows 11 IoT Enterprise LTSC 24H2 (64bit) 2. Windows 10 IoT Enterprise LTSC 21H2 (64bit) 3. Linux Ubuntu 22.04		Android 11
TPM & vPro	1. Intel vPro (i5/i7 CPU only) 2. S/W TPM 2.0 (BIOS)	S/W TPM 2.0 (BIOS)	N/A
Power Supply	AC-In 100~240V / DC-Out 12V, 120W		
Reliability	System operating temperature: 0~40°C / 32~104°F System humidity: 15% ~ 80% Storage temperature: -20~60°C / -4~140°F		
Dimensions (Wx Hx D)	Wall mount: 415 x 946 x 163 mm / 16.34 x 37.24 x 6.42 inch Floor stand: 415 x 1480-1780 x 589 mm / 16.34 x 58.27-70.08 x 23.19 inch		
Weight	Wall mount: 21 kg / 46.3 lbs Floor stand: 64 kg / 141.1 lbs		

\*Specification is subject to change without prior notice

## Contact US

**Partner Tech USA Inc.**  
1255 N. Patt Street  
Anaheim, CA 92801  
Phone: 949-598-1888  
sales@partnertechcorp.com

**Partner Tech Mexico & Latin America**  
Blvd. Palmas Hills 1, Piso 8, Valle de las Palmas, Huixquilucan  
Ciudad de México, 52764, Mexico  
Phone: 949-598-1888  
info@partnertechcorp.com

