



CARE . TRUST . RESPONSIBILITY

K27 II

INTELLIGENT SELF-CHECKOUT ORDERING KIOSK




Save on labor costs, reduce wait times, and increase the average order size with the K27 II self-order kiosk for use in quick service restaurants and other hospitality and retail venues.

K27 II is a space-saving kiosk solution that can be easily customized to meet your business' and branding requirements. Choose between a broad selection of peripherals such as 2D bar code scanner, camera, RFID card reader, thermal printer with the option of adding more modules later. Select between floor stand and wall mount with optional double-sided operation. In addition, the color and shape of the enclosure can be customized to match your brand.


SPECIAL FEATURES

- Large 27-inch capacitive touch display
- 1920 x 1080 screen resolution
- Fanless with high performance Intel CPU and high speed M.2 SATA SSD
- Select between many different integrated peripherals such as RFID, bar code scanner, EMV terminal, printer, camera, ADA keypad, etc)
- Easily upgrade the functionality with more peripherals
- Modular design makes maintenance and repairs more cost-efficient
- Possible to customize the the color and shape of the enclosure
- ADA compliant


For an optimized workflow

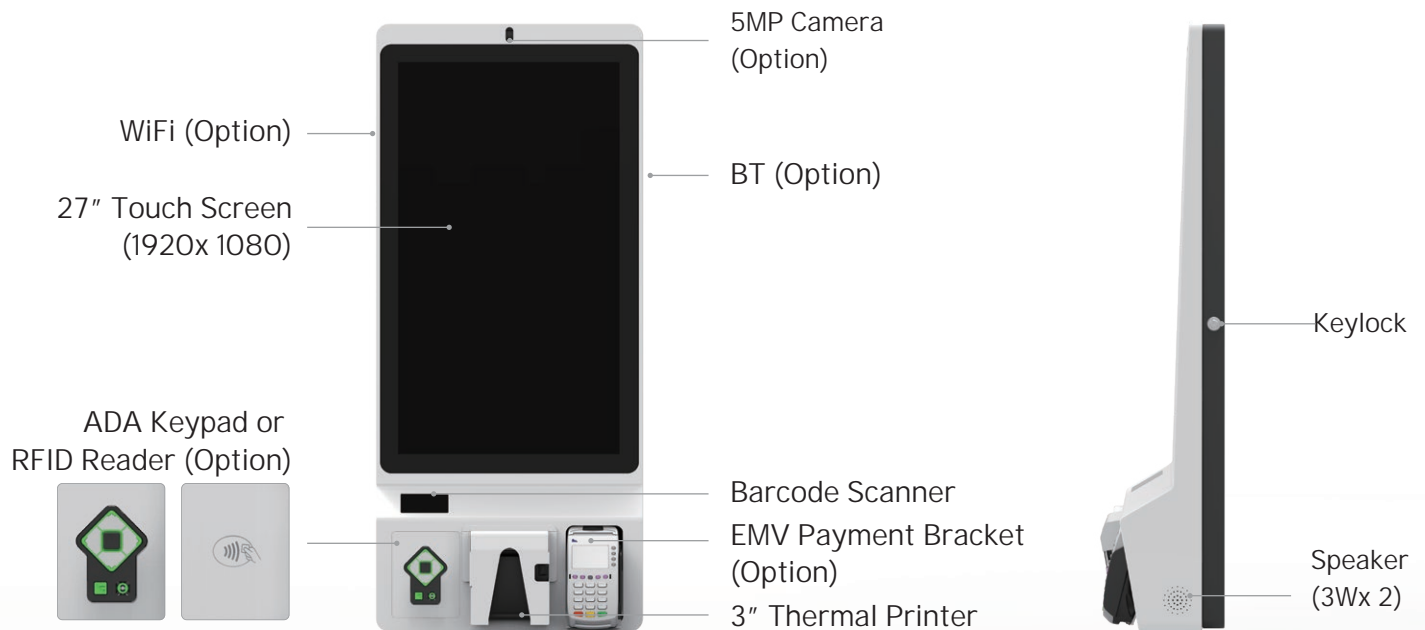


Base Options

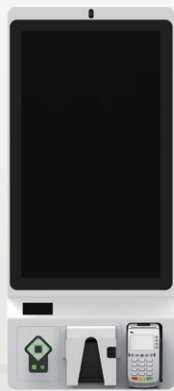

Wall Mounted

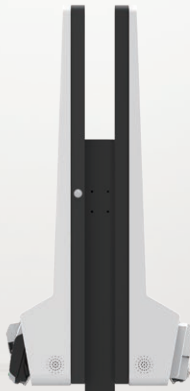

Double Sided

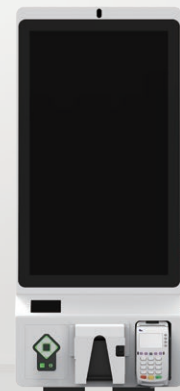

Floor Standing



Item	K27 II Kiosk	
Display	27" Resolution 1920x1080 (300 nits) 27" Resolution 1920x1080 (650 nits) Options	
Touch	PCAP Touch	
CPU	Intel® Core™ i3-1215UE (Alder lake-P) Intel® Core™ i5-1245UE, vPro (Alder lake-P)	Intel® Celeron® J6412 (Elkhart Lake)
Memory	DDR4 4GB, 8GB, 16GB, 32G	DDR4 4GB, 8GB, 16GB
Storage	M.2 PCIe SSD: 128G / 256G / 512G	M.2 PCIe SSD: 128G / 256G
External I/O Interface	1 x Gigabit Ethernet	
	1 x AC Male Power Socket	
	1 x Power switch Button	
Speaker	2 x Speaker 3W	
Printer	3" Thermal printer	
Optional Peripheral	2D Barcode Scanner	
	EMV Terminal Bracket	
	5M Camera	
	RFID Reader	
	ADA keypad	
	Floor stand (including wheels & handle)	
	Wallmount bracket	
WIFI/BT(option)	IEEE 802.11 a/b/g/n/acR2/axR2, BT5.2	
Operation System	Windows 11 IoT Enterprise GAC (64bit)	
	Windows 10 IoT Enterprise (64bit)	
	Linux (Ubuntu 22.04)	
TPM	1. Intel vPro (i5 CPU only)	S/W TPM 2.0 (BIOS)
	2. S/W TPM 2.0 (BIOS)	
Power Adaptor	AC-In 100~240V / DC-Out 12V, 120W	
Reliability	System Operating Temperature: 32~104°F	
	System Humidity: 15% ~ 80%	
	Storage Temperature: -4~140°F	
Dimensions	Wall Mount : 16.35 (W) x 37.23 (H) x 6.42 (D) inch	
	With Floor Stand : 21.65 (W) x 74.8 (H) x 24.02 (D) inch	
Weight	Wall Mount: 46.3 lbs	
	With Floor Stand: 141.1 lbs	

*Specification is subject to change without prior notice

**PARTNER TECH USA INC.**

1255 N. Patt Street
 Anaheim, CA 92801
 Phone: 949-598-1888
sales@partnertechcorp.com