SUNMI T2s Desktop POS New







Performance breakthroughs on your fingertips.

High performance octa-core processor, up to 2.2Ghz. Equipped with large-capacity memory of 3GB RAM+32GB ROM, T2s allows you to experience unparalleled operation smoothness.


Unique printing technology, improved printing efficiency.

T2s adopts an 80mm thermal printer with a print speed up to 250mm/s, which has employed SUNMI's unique printing technology to smooth your printing.



Anti-interference touch screen.

To realize your demand on worry-free dual-display interaction, we employ an industrial-grade touch chip which is more resistant to EMI. You can feel free to use T2s even near high-power devices.



The 15.6" 1920×1080 main display has a multitouch screen, and 2 secondary display options (15.6", 10.1") are open for your choice.




Optional Accessories



NFC&MSR Card Reader


For NFC card reading and magnetic stripe card reading.

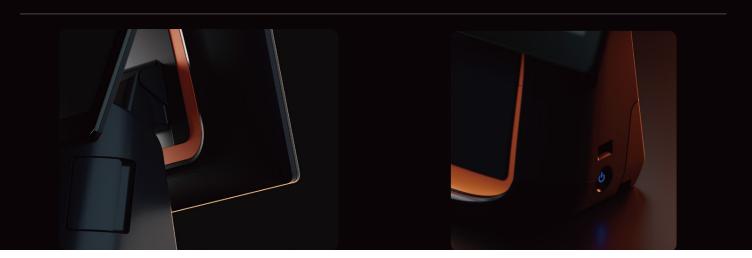

Partner Tech Middle East FZCO is Distributing Sunmi Technology














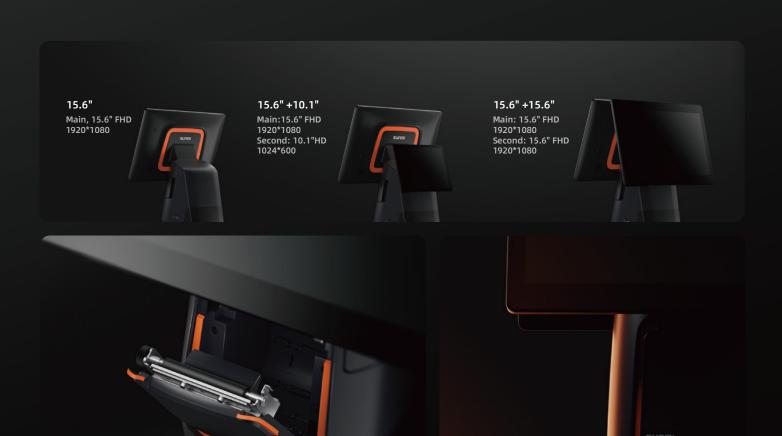

SUNMI T2s Tech Specs

Model Approved

Config 1: L1561 (Single-Display Version) Config 2: L1562 (Dual-Display (small + big) Version)) Config 3: L1563 (Dual-Display (big + big) Version)

os

Android 9.0 SUNMI OS

CPU

Kryo-260, Octa-core up to 2.2GHz

Memory

32GB ROM+3GB RAM 64GB ROM+4GB RAM

Camera

Face Recognition camera or normal camera (only for configuration 2&3)

Display

Capacitive Touch Screen
Config 2: Main:15.6" FHD, 1920*1080
Capacitive Touch Screen
Sub: 10.1" HD, 1024*600

Capacitive Touch Screen

Config 3: Main:15.6" FHD, 1920*1080 Capacitive Touch Screen Sub: 15.6" FHD, 1920*1080 Capacitive Touch Screen

Printer

Diameter: 80mm Speed: 250mm/s Support Automatic Cutter

Speaker

SIM Card Slot

1* Micro SIM (optional)

Network

2G&3G&4G (optional)

Wi-Fi

IEEE 802.11 a/b/g/n /ac

Bluetooth

BT2.1/3.0/4.0/5.0

LAN

LAN 100M

Buttons

1* power button 2* volumn button

External Storage Card

Support Micro SD (TF) Up to 64GB

Interface

5* USB TypeA, 1* RJ11 Serial port 1* RJ12 Cash drawer port, 1* RJ45 LAN port 1* Audio jack, 1* Power port, 1* Micro-USB (debug)

Power Adapter

Input: AC100~240V/1.7A

Dimensions

407*382*232mm (max)

Weight

Config 1: 5.1 Kg Config 2: 5.7 Kg Config 3: 7.4 Kg

Environment

Operating temperature: 0°C ~ 40°C