


Kiosk

K27 II

Self-service / Self-order Kiosk

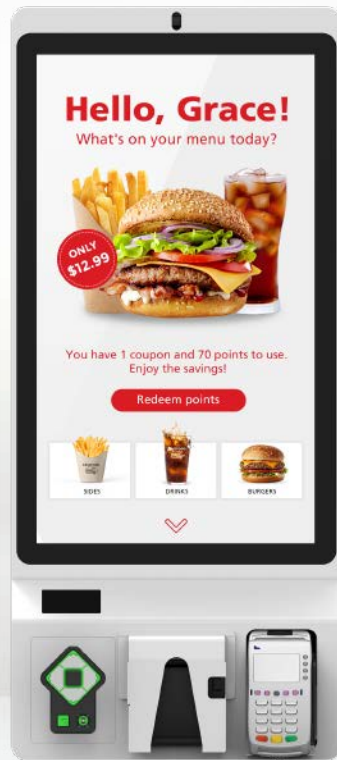


FEATURES

- Bright 27" (1920 x 1080) touch display
- Wall mount or floor stand
- Single or doublesided operation
- Support for Windows 10/11, Linux Ubuntu and Android 11
- Multiple payments options (MSR, EMV and contactless)
- Customizable and modular design
- ADA keypad (option)

Kiosk

PARTNER

For an optimized workflow

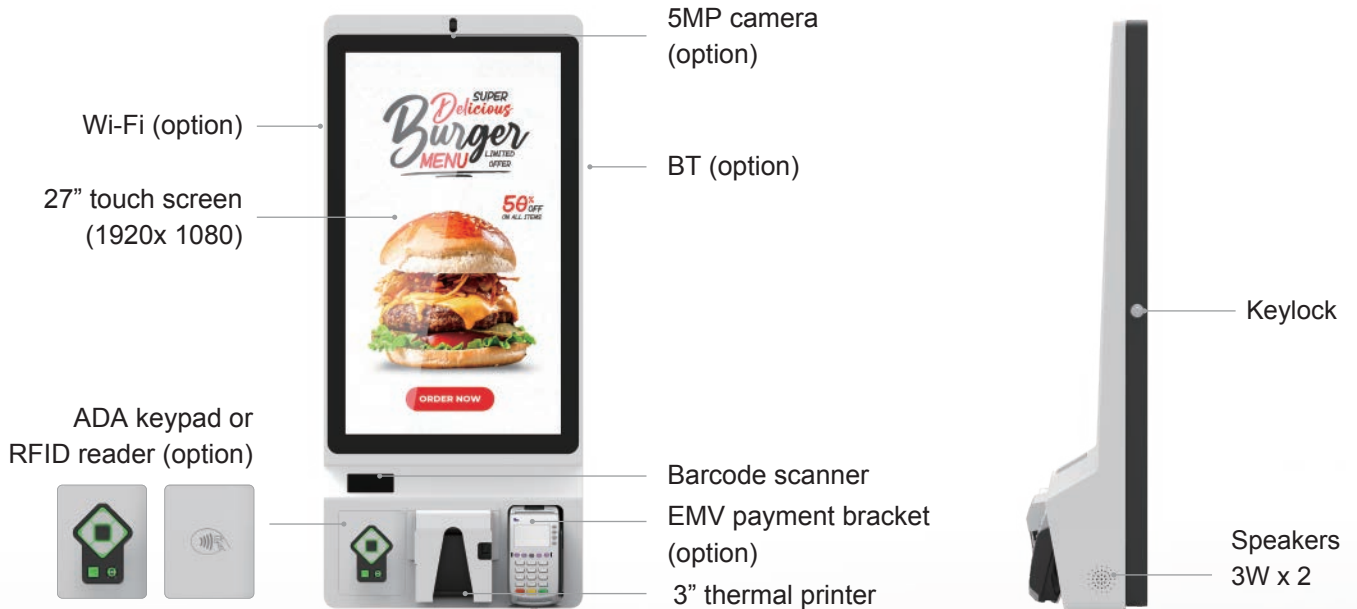

Base Options



Wall Mounted



Double Sided



Floor Standing



Kiosk

PARTNER

Specifications



| Item | K27 II | | | |
|----------------------|--|--|---|---|
| Display | 27", 16:9, 1920 x 1080, 300 nits 27", 16:9, 1920 x 1080, 650 nits (option) | | | |
| Touch | PCAP touch | | | |
| CPU | Alder Lake-P Intel® Celeron® 7305 Intel® Core™ i3-1215U Intel® Core™ i5-1245U, vPro Intel® Core™ i7-1265U, vPro | Elkhart Lake Intel® Celeron® J6412 | Kaby Lake-U Intel® Core™ i3-7100U Intel® Core™ i5-7300U | Rockchip RK3399 |
| Memory | DDR4 4GB, 8GB, 16GB, 32GB | | | LDDR4 4GB |
| Storage | M.2 PCIe SSD: 128GB / 256GB / 512GB | | | eMMC 32GB + 1 x micro SD card slot (up to 128GB) |
| I/O Interface | 1 x Gigabit Ethernet 1 x AC male power socket 1 x power switch button | | | |
| Speakers | 2 x speaker (3W) | | | |
| Printer | 3" thermal printer | | | |
| Peripheral Options | 2D barcode scanner EMV terminal bracket 5MP camera RFID / NFC reader ADA keypad | | | |
| Mounting Options | Floor stand (including wheels & handle) VESA wallmount bracket | | | |
| Wi-Fi / BT (option) | Wi-Fi 6E Intel AX210, IEEE 802.11 a/b/g/n/acR2/axR2 BT 5.2 | | | 2.4GHz/5GHz (IEEE 802.11a/b/g/n/ac) , BT 4.2 (supports BLE) |
| Operating System | 1. Windows 11 IoT Enterprise GAC (64bit) ready 2. Windows 10 IoT Enterprise LTSC 21H2 (64bit) 3. Linux Ubuntu 22.04 | | 1. Windows 10 IoT Enterprise LTSC 21H2 (64bit) 2. Linux Ubuntu 18.04 | Android 11 |
| TPM & vPro | 1. Intel V-Pro (i5/i7 CPU only) 2. S/W TPM 2.0 (BIOS) | S/W TPM 2.0 (BIOS) | 1. Intel V-Pro (i5 CPU only) 2. S/W TPM 2.0 (BIOS) | N/A |
| Power Supply | AC-In 100~240V / DC-Out 12V, 120W | | | AC-In 100~240V / DC-Out 12V, 90W |
| Reliability | System operating temperature: 0~40°C / 32~104°F System humidity: 15% ~ 80% Storage temperature: -20~60°C / -4~140°F | | | |
| Dimensions (Wx Hx D) | Wall mount: 415.2 x 945.6 x 163.19 mm / 16.35 x 37.23 x 6.43 in Floor stand: 550 x 1900 x 610 mm / 21.65 x 74.80 x 24.02 in | | | |
| Weight | Wall mount: 23 kg / 50.71 lb Floor stand: 57 kg / 125.67 lb | | | |

*Specification is subject to change without prior notice

Contact US

Partner Tech USA Inc.
1255 N. Patt Street
Anaheim, CA 92801
Phone: 949-598-1888
sales@partnertechcorp.com

Partner Tech Mexico & Latin America
Blvd. Palmas Hills 1, Piso 8, Valle de las Palmas, Huixquilucan
Ciudad de México, 52764, Mexico
Phone: 949-598-1888
info@partnertechcorp.com

