

K27 II

INTELLIGENT SELF-CHECKOUT ORDERING KIOSK



Save on labor costs, reduce wait times, and increase the average order size with the K27 II self-order kiosk for use in quick service restaurants and other hospitality and retail venues.


K27 II is a space-saving kiosk solution that can be easily be customized to meet your business' and branding requirements. Choose between a broad selection of peripherals such as 2D bar code scanner, camera, RFID card reader, thermal printer with the option of adding more modules later. Select between floor stand and wall mount with optional double-sided operation. In addition, the color and shape of the enclosure can be customized to match your brand.

SPECIAL FEATURES


- Large 27-inch capacitive touch display
- 1920 x 1080 screen resolution
- Fanless with high performance Intel CPU and high speed M.2 SATA SSD
- Select between many different integrated peripherals such as RFID, bar code scanner, EMV terminal, printer, camera, ADA keypad, etc)
- Easily upgrade the functionality with more peripherals
- Modular design makes maintenance and repairs more cost-efficient
- Possible to customize the the color and shape of the enclosure

K27 II


For an optimized workflow

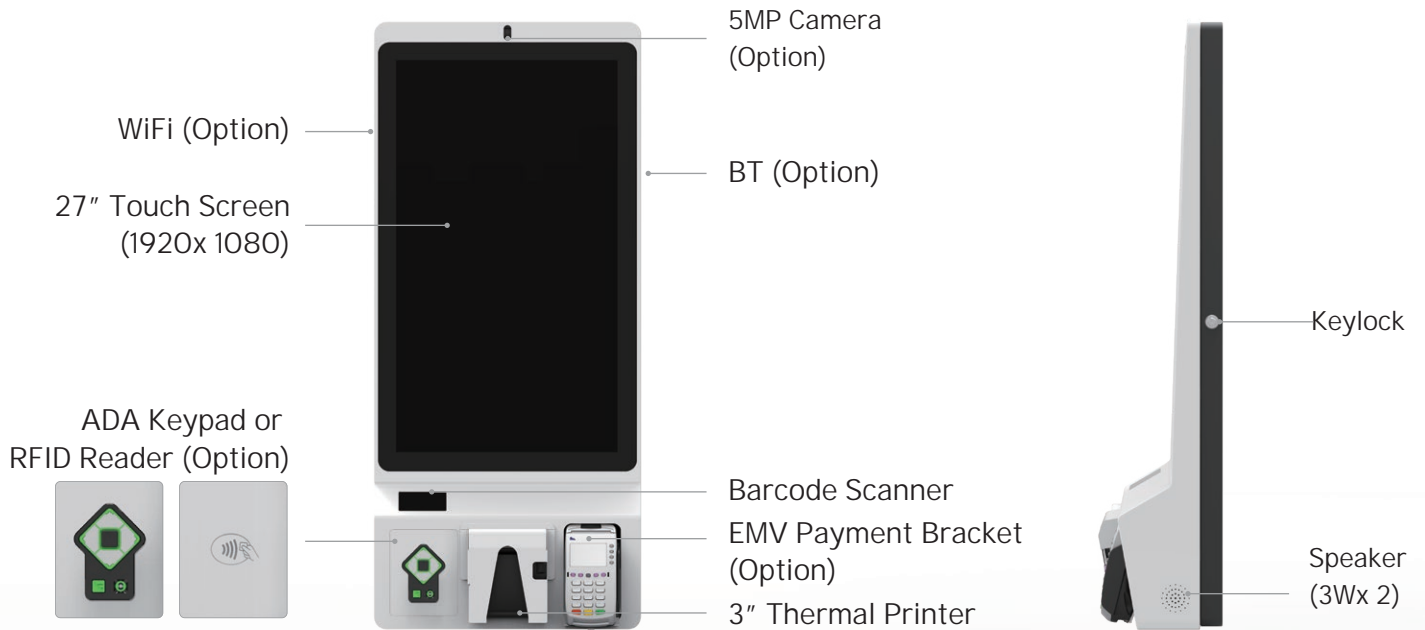


Base Options

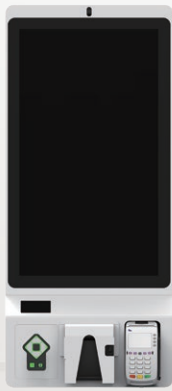

Wall Mounted

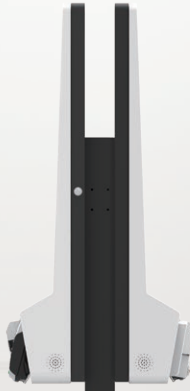

Double Sided

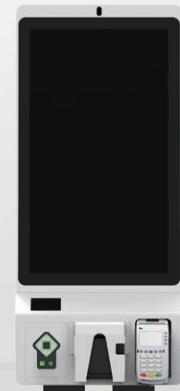

Floor Standing



K27 II

Item	K27 II Kiosk	
Display	27" Resolution 1920x1080 (300 nits) 27" Resolution 1920x1080 (650 nits) Options	
Touch	PCAP Touch	
CPU	Intel® Core™ i3-1215UE (Alder lake-P) Intel® Core™ i5-1245UE, vPro (Alder lake-P)	Intel® Celeron® J6412 (Elkhart Lake)
Memory	DDR4 4GB, 8GB, 16GB, 32G	
Storage	M.2 PCIe SSD: 128G / 256G / 512G	M.2 PCIe SSD: 128G / 256G
External I/O Interface	1 x Gigabit Ethernet 1 x AC Male Power Socket 1 x Power Switch Button	
Speaker	2 x Speaker 3W	
Printer	3" Thermal Printer	
Optional Peripheral	2D(QR) Bar Code Scanner EMV Terminal Bracket : Lane 5500, Lane 3000, Verifone VX 805A, Verifone VX520, Ingenico iUC285, Ingenico iPP320, IDTECH AUGUSTA, AS 350, PAX Q80, Easycard Camera : 5MP RFID Reader : ISO 15693 (R/W), ISO 18092 (R/W), ISO 14443-A (R/W), ISO 14443-B (Read UID) ADA Keypad : Assistive, audio enabled keypad offering menu navigation Floor Stand (including wheels & handle) Wallmount Bracket	
WIFI/BT(option)	IEEE 802.11 a/b/g/n/acR2/axR2, BT5.2	
Operation System	Windows 11 IoT Enterprise GAC (64bit) Windows 10 IoT Enterprise (64bit) Linux (Ubuntu 22.04)	
TPM	1. Intel vPro (i5 CPU only) 2. S/W TPM 2.0 (BIOS)	S/W TPM 2.0 (BIOS)
Power Adaptor	AC-In 100-240V / DC-Out 12V, 120W	
Reliability	System Operating Temperature: 32-104°F System Humidity: 15% ~ 80% Storage Temperature: -4-140°F	
Dimensions	Wall Mount : 16.35 (W) x 37.23 (H) x 6.42 (D) inch Floor Stand : 21.65 (W) x 74.8 (H) x 24.02 (D) inch	
Weight	Wall Mount: 46.3 lb ; Floor Stand: 141.1 lb	

*Specification is subject to change without prior notice



PARTNER TECH USA INC.
15320 Barranca Parkway Suite 150
Irvine, CA 92618
Phone: 949-598-1888
sales@partnertechcorp.com