


## **RECEIPT PRINTER RP-630**

High Performance Thermal Printer

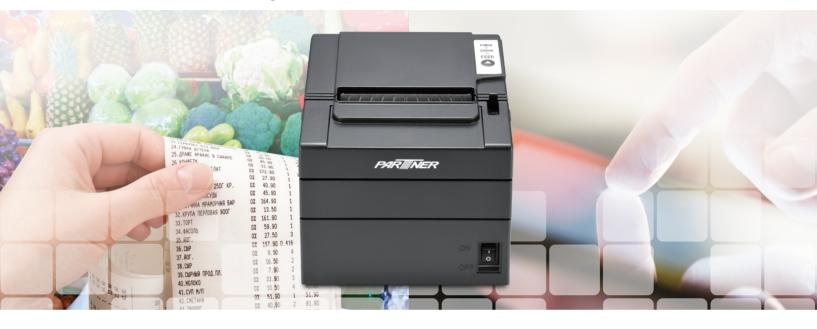

RP-630 is the most solid and powerful thermal receipt printer for retail and hospitality environment. Its highspeed and Triple-Interface connectivity are suitable for any diversified environment and system integration.

Maximum protection against dust and liquid splashes can be applied through its Optional Water Spill-Proof Cover and Power Adaptor Cover, which are critical in extreme environment such as restaurants, bars, kitchens....etc. RP-630 is also certified by Energy Star, which is a perfect solution for both power efficiency as well as environmental-friendly.



## SPECIAL FEATURES

Support 58/80mm paper width (2 and 3 inch) Resolution 203dpi x 180 dpi 250mm/sec high speed printing Triple Interfaces: USB+Serial+Ethernet Energy Star certified JAVAPOS/OPOS/Linux support Optional Water Spill-Proof Cover Optional Power Adaptor Cover

## TECHNICAL DATA

## **RP-630**



Item		RP-630		
Printing	Method	Direct Thermal		
	Paper Loading Scenario	Тор		
	Speed	250mm/sec		
	Width	80mm		
	Resolution	203DPI x 180DPI		
Paper	Туре	Thermal Paper		
	Width	57.5mm / 80mm		
	Thickness	0.06mm ~ 0.08mm		
	Roll Diameter	Max. 83mm		
	Roll Core Inner	12.5mm ± 0.5mm		
Memory		RAM : 2MB, Flash : 4MB		
Reliability	TPH Life	150km		
	MCBF	60,000,000 Lines		
Auto cutter		1,500,000 cuts		
Sensor		Paper End, Cover Open, Black Mark		
Interface		USB+Serial + Ethernet		
Emulation		ESC/POS Command Compatible		
Driver		Window, MAC, LinuxCUPS, OPOS, JavaPOS		
Power	Туре	External Adaptor		
	AC	100 ~ 240Vac 50/60 Hz		
	DC	24Vdc / 2.15A		
Temperature	Temperature	Operation 41°F ~ 113°F		
	Dimension	Storage -40°F ~ 140°F		
Dimension		7.87in x 5.71in x 5.71in (L x W x H)		
Weight		3.2 lbs		
Color		Black		
Certificate		FCC, CE, CB, 3C, Energy Star, VCCI		

Optional Water Spill-Proof Cover

Optional Power Adaptor Cover





PARTNER TECH USA INC. 15320 Barranca Parkway Suite 150 Irvine, CA 92618 Phone: 949-598-1888 sales@partnertechcorp.com





