

Cash Drawer

# SUNMI Mini Cash Drawer

The high-toughness ABS matt panel is adopted which is rustless and won't hurt your hands.


Same capacity, reduced volume (by 22.5%) compared with traditional small cash drawers.

It can be opened with one press on the key for solid and smooth industrial bearings are used.

With wide-area voltage driven design it suits to 9V/12V/24V cash register output voltage.

Give you a neat work table with a cable storage compartment on the top.

Strengthened steel metallic clips covered by durable ABS is adopted for noise reduction.

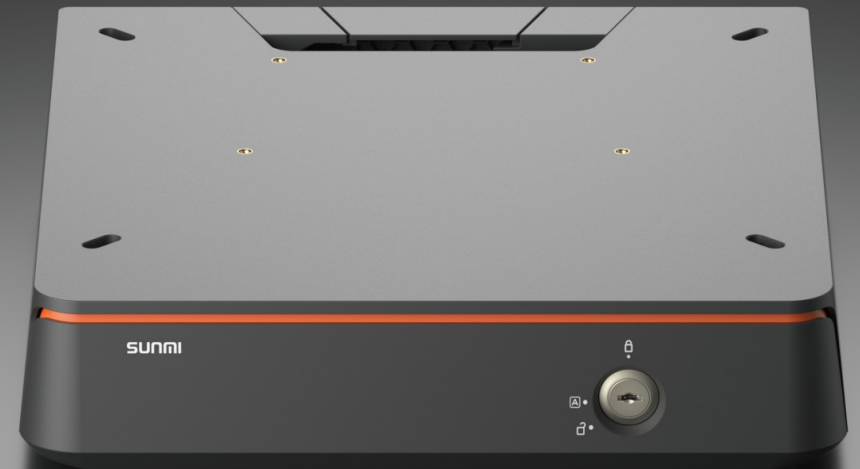

10Kg  
bearable



1,000,000+  
operations



Open  
interfaces



Customizable  
safety reminder



Three positions  
lock design

# SUNMI Mini Cash Drawer

## Technical specifications



### Cash Drawer

Plastic and metallic



### Trays

Four normal bill & one big bill trays  
Three coin trays



### Metallic Bearing

Up to 10kg bearable



### Cable

RJ12, 6P4C, 0.8m



### Lock

Three positions lock (electronic, manual and deadlock)



### Bill Clip

Plastic and metallic



### Cable Storage Compartment

Rear-set compartment with cover



### Drive Voltage

DC9V~24V, 1A



### Drive Pulse Width

100ms – 300ms



### Drive Protections

3A overcurrent protection triggered by electromagnetic valve shrot circuit  
Input pulse overvoltage protection  
Input pulse timeout protection  
Self-adaptive to 9V~28V input voltage  
Contact ESD 8KV/air ESD 15KV  
Termal shutdown



### Service Life

≥1000000 operations



### Noise

<50dB



### Status Feedback

Status detection switch



### Size

W317mm x L332mm x H72mm



### Weight

2.3 Kg



### Working Environment

Working temperature and humidity:  
0°C ~ 45°C, 30% ~ 85%  
Storage temperature and humidity:  
-20°C ~ 60°C, 10% ~ 90%

